


TEST REPORT IEC 62133-2

**Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications –
Part 2: Lithium systems**

Report Number.....:	CMC250108012
Date of issue.....:	2025-02-24
Total number of pages.....:	28 pages
Tested by (name, signature).....:	Sago Su/Testing Engineer 
Reviewed by (name, signature).....:	Carol Xiong/Project Manager 
Approved by (name, signature).....:	Barry He/Technical Manager 
Name of Testing Laboratory preparing the Report.....:	CMC Testing International (Shenzhen) Co., Ltd
Address.....:	1-3/F., Building 7, He'er Hongben Industrial Zone, Dawangshan Community, Shajing Subdistrict, Baoan District, Shenzhen, Guangdong, China
Applicant's name.....:	Dongguan chenxinsheng Energy Co., Ltd
Address.....:	Room 201, building 1, No.28, Chenwu main road, Wusha, Chang'an Town, Dongguan, Guangdong, China
Manufacturer's name.....:	Dongguan chenxinsheng Energy Co., Ltd
Address.....:	Room 201, building 1, No.28, Chenwu main road, Wusha, Chang'an Town, Dongguan, Guangdong, China
Test specification:	
Standard.....:	IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021
Test procedure.....:	Type approved
Non-standard test method.....:	N/A
Test result.....:	Pass
Test item description:	
Trade Mark.....:	N/A
Model/Type reference.....:	18650
Ratings.....:	3.7V, 4000mAh, 14.8Wh
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the CMC. The authenticity of this Test Report and its contents can be verified by contacting the CMC, responsible for this Test Report.	



List of Attachments (including a total number of pages in each attachment):

Attachment 1: Photo documentation (On pages 24-27).

Summary of testing:
Tests performed (name of test and test clause):

cl.5.6.2 Design recommendation;
cl.7.1 Charging procedure for test purposes (for Cells and Batteries);
cl.7.2.1 Continuous charging at constant voltage (Cells);
cl.7.2.2 Case stress at high ambient temperature (Batteries);
cl.7.3.1 External short circuit (Cells);
cl.7.3.2 External short circuit (Batteries);
cl.7.3.3 Free fall (Cells and Batteries);
cl.7.3.4 Thermal abuse (Cells);
cl.7.3.5 Crush (Cells);
cl.7.3.6 Over-charging of battery;
cl.7.3.7 Forced discharge (Cells);
cl.7.3.8 Mechanical tests (Batteries);
cl.7.3.9 Design evaluation – Forced internal short circuit (Cells);

Tests are made with the number of cells and batteries specified in IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 Table 1.

Testing location:
CMC Testing International (Shenzhen) Co., Ltd.

1-3/F., Building 7, He'er Hongben Industrial Zone, Dawangshan Community, Shajing Subdistrict, Baoan District, Shenzhen, Guangdong, China

Summary of compliance with National Differences: List of countries addressed:

N/A

☒ The product fulfils the requirements of: EN 62133-2:2017, EN 62133-2:2017/A1:2021/AC:2022-01.

Use of uncertainty of measurement for decisions on conformity (decision rule):

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

☐ Other: N/A (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

Li-ion Battery
18650 11MR19/66-2
3.7V 4000mAh 14.8Wh
Dongguan chenxinsheng Energy Co., Ltd
Date Code: YYYYMMDD Made in China
WARNING: Risk of Fire and Burns. Do Not Open, Crush, Heat
Above 55°C/131°F or Incinerate. Do not short circuit. If bulges
severely, discontinue use. Follow Manufacturer's Instructions.

Date Code: YYYYMMDD (YYYY=year, MM=month, DD=day)



DC Connector

Test item particulars..... :	
Classification of installation and use.....	To be defined in final product
Supply Connection.....	DC Connector
Recommend charging method declared by the manufacturer.....	Charging the battery with 1600mA constant current and 4.20V constant voltage until the current reduces to 40mA at ambient 20°C±5°C.
Discharge current (0.2 It A).....	800mA
Specified final voltage.....	3.0V
Upper limit charging voltage per cell.....	4.20V
Maximum charging current.....	4000mA
Charging temperature upper limit.....	45°C
Charging temperature lower limit.....	10°C
Polymer cell electrolyte type.....	☐ gel polymer ☐ solid polymer ☒ N/A
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Testing..... :	
Date of receipt of test item.....	2025-01-08
Date (s) of performance of tests.....	2025-02-07 to 2025-02-17
Test Environment Condition.....	Ambient temperature: 21.4°C ~ 23.3°C
Sample identification.....	SN250108012C001 ~ SN250108012C053 SN250108012B001 ~ SN250108012B022
General remarks:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. “(CXXX)” refers to sample number of cells, “X” is 0~9; “(BXXX)” refers to sample number of batteries, “X” is 0~9; “(See Enclosure)” refers to additional information appended to the report. “(See appended table)” refers to a table appended to the report.	
Throughout this report a ☐ comma / ☒ point is used as the decimal separator.	
Name and address of factory (ies)..... : Same as applicant.	

General product information and other remarks:

This battery is constructed with two lithium-ion cells (1S2P), and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below (clause 7.1.1):

Model (Battery)	Rated capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Final Voltage
18650	4000mAh	3.7V	1600mA	1600mA	4000mA	4000mA	4.20V	3.0V


The main features of the cell in the battery are shown as below (clause 7.1.1):

Model (Cell)	Rated capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Recommend Charge Voltage	Final Voltage
INR18650-2000mAh	2000mAh	3.7V	800mA	800mA	2000mA	2000mA	4.20V	3.0V


The main features of the cell in the battery are shown as below (clause 7.1.2):

Model (Cell)	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
INR18650-2000mAh	4.20V	100mA	10°C	45°C

Construction:

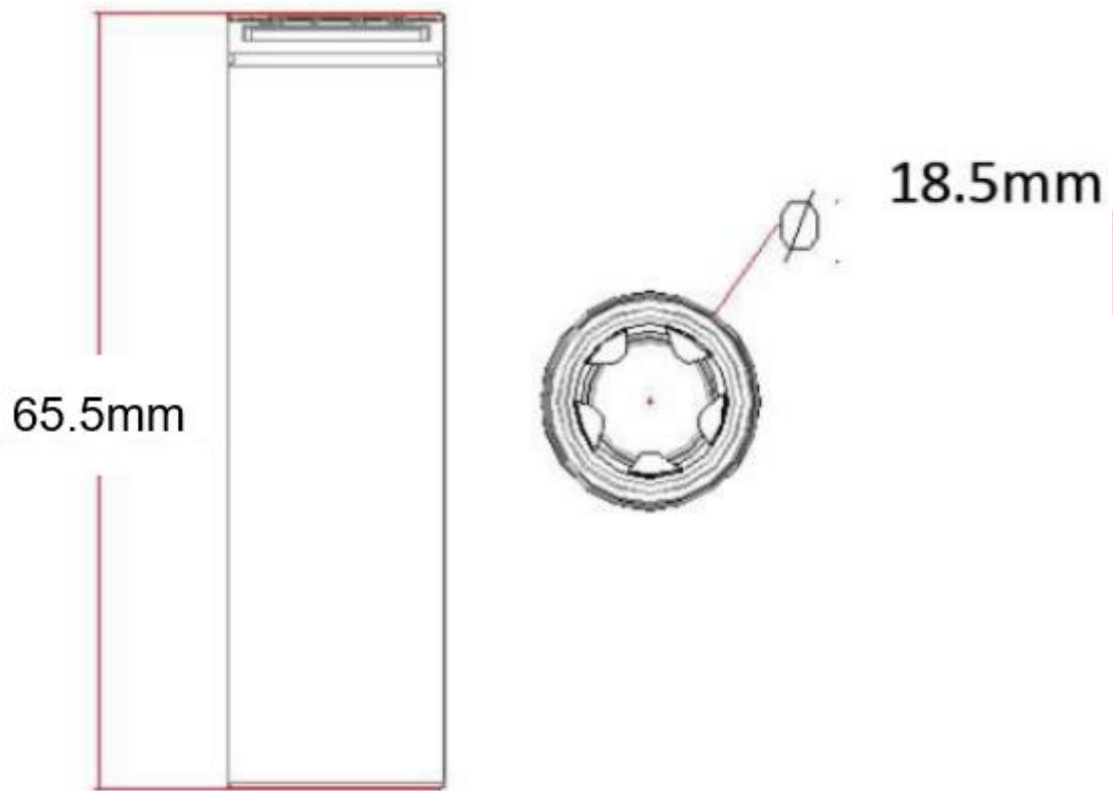


Cell

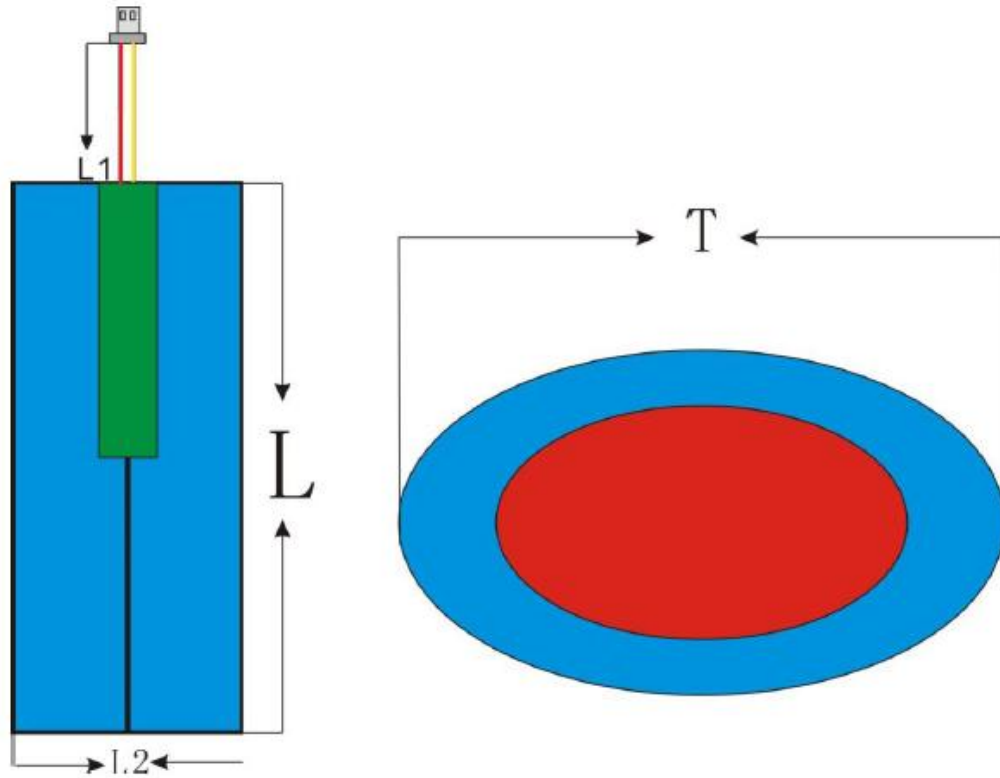

(Maximum) Dimension: T: 18.6, L2: 37.0, L: 66.0
Battery (Unit: mm)

Circuit diagram:

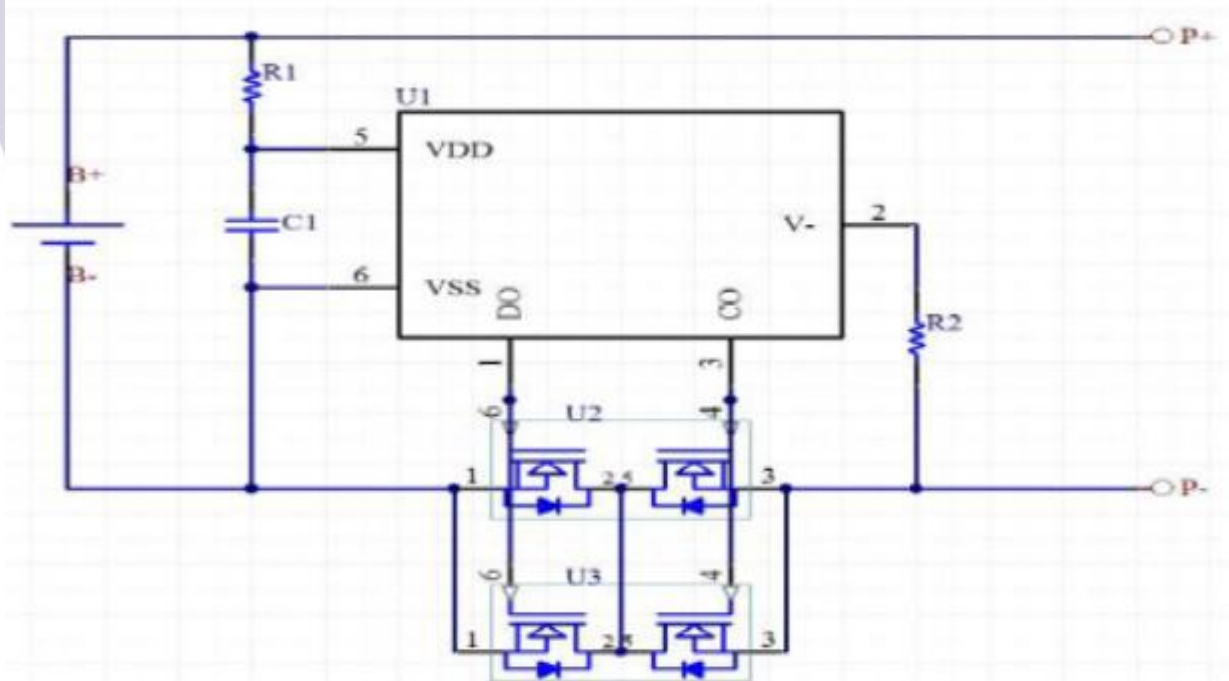



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal surface exists.	N/A
	Insulation resistance (MΩ)..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the top of cylindrical cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the manufacturer's specification.	P
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC Connector contacts complied with the requirements.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance	Complied.	P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	1S2P, Protective circuit equipped on battery.	P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly	Current, voltage and temperature limits specified by cell manufacturer.	P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2	1S2P, Max. charging voltage of cell: 4.20V, not exceed 4.20V specified in Table 2.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage	Final voltage of cell: 3.0V, not exceed the final voltage specified by cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuits provided.	P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	Built-in batteries, mechanical protection for cells should be provided by end product.	N/A
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final system.	N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
5.7	Quality plan		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2015 certificate provided.	P
5.8	Battery safety components	See TABLE: Critical components information	N/A

6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection		N/A
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	P

7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$, using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at $20 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$ at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method	Charge temperature specified by manufacturer: 10-45°C. 10°C used for lower limit tests. 45°C used for upper limit tests.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)	Tested complied.	P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7 days with 800mA.	P
	Results: No fire. No explosion. No leakage..... :	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)	Tested as request by client.	P
	Oven temperature (°C)..... :	70.1°C	—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery case	P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)	Tested complied.	P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Single fault conducted on three samples.	P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies on MOSFET U2 (pin 1-pin 3)	P
	Results: No fire. No explosion..... :	(See appended table 7.3.2)	P
7.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion	No fire. No explosion.	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C)..... :	130.3°C	—
	Results: No fire. No explosion	No fire. No explosion.	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN $\pm$ 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion..... :	(See appended table 7.3.5)	P
7.3.6	Over-charging of battery	Tested complied.	P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or	5.88V applied.	P
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)	Tested complied.	P
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		P
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		P
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		P
	Results: No fire. No explosion..... :	(See appended table 7.3.7)	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration	Tested complied.	P
	Results: No fire, no explosion, no rupture, no leakage or venting..... :	(See appended table 7.3.8.1)	P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.3.8.2	Mechanical shock	Tested complied.	P
	Results: No leakage, no venting, no rupture, no explosion and no fire.....:	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for.....:	France, Japan, Republic of Korea and Switzerland.	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	800N for cylindrical cells.	P
	Results: No fire.....:	(See appended table 7.3.9)	P
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user		N/A
8.2	Small cell and battery safety information		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
9	MARKING		P
9.1	Cell marking		N/A
	Cells marked as specified in IEC 61960, except coin cells	The final product is battery	N/A



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		P
	Batteries are marked as specified in IEC 61960, except for coin batteries	See marking plate.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity	Not coin batteries.	N/A
	Batteries are marked with an appropriate caution statement		P
	- Terminals have clear polarity marking on the external surface of the battery, or		N/A
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections	DC Connector used.	P
9.3	Caution for ingestion of small cells and batteries		N/A
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2	Not coin cells and batteries.	N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package	Not intended for direct sale.	N/A
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P
	- Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
10	PACKAGING AND TRANSPORT		N/A
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A
ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.1	General		P
A.2	Safety of lithium ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage	4.20V applied.	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		P
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.20V applied.	P
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 10-45°C.	N/A
A.4.3	High temperature range		N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint	Cell specified final voltage 3.0V, not exceed 3.0V specified by cell manufacturer.	P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		P
A.5.5.1	Insertion of nickel particle in winding core		P
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		P
A.5.6	Insertion of nickel particle in prismatic cell		N/A
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		N/A
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General	Not coin cells.	N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing..... :		N/A
	Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A



IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX E	PACKAGING AND TRANSPORT	N/A	
---------	-------------------------	-----	--

ANNEX F	COMPONENT STANDARDS REFERENCES	N/A	
---------	--------------------------------	-----	--



TABLE: Critical components information					P
Object / part No.	Manufacturer / trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	Jiangxi Chengjiang New Energy Co., Ltd.	INR18650-2000mAh	3.7V, 2000mAh	IEC 62133-2:2017, IEC 62133-2:2017/AM D1:2021	Tested with appliance
-Positive electrode	GEM(WUXI)ENERGY MATERIAL.Co.,Ltd	L-9054	Li(Ni _{0.9} Co _{0.05} Mn _{0.05})O ₂ , content: 16%	--	--
	JIANGSU HENGTRON NANOTECH CO., Ltd.	PD05	LiFePO ₄ , content: 14%	--	--
	Hubei Saijie New Material Co.,Ltd	M4-01	LiMn ₂ O ₄ , content: 70%	--	--
-Negative electrode	HJNE Technology Company Limited	HCL-1	Graphite, C	--	--
-Electrolyte	GuiZhou Hisun Lithium Energy Technology Co.,Ltd.	HS-CJ5C04S	LiPF ₆ +Solution, Conductivity (Ms/cm): 10.69±0.5, H ₂ O<20ppm, HF≤50ppm	--	--
-Separator	Jiangxi Yutu New Material Co. , Ltd.	16μm	PE, 61mm (width) × 0.016mm (thickness), Shutdown temperature: ≥130°C	--	--
PCB	SHEN ZHEN JIRUIDA CIRCUIT TECHNOLOGY CO LTD	JRD-S	V-0, 130°C	UL 796 UL 94	UL E340032
PCB (Alternative)	Interchangeable	Interchangeable	V-0, 130°C	UL 796 UL 94	UL approved
Protective IC (U1)	Dongguan Baiqiang power technology Co., Ltd.	BQ8261-G3JS	V _{OC} : 4.28±0.025V, V _{OD} : 3.0±0.08V, T _{opr} :-40~85°C, T _{stg} :-55~125°C	--	Tested with appliance
MOSFET (U2, U3)	Dongguan Baiqiang power technology Co., Ltd.	8205A	V _{DS} : 16V, V _{GS} : ±12V, I _D : 5A(@T _J =25°C), T _J , T _{STG} : -55 ~ 150°C	--	Tested with appliance
Lead wire	DONGGUAN ZHONGZHENG WIRE & CABLE TECH CO LTD	1007	22AWG, 80°C, 300Vac	UL 758	UL E336285
Lead wire (Alternative)	Interchangeable	Interchangeable	22AWG, 80°C, 300Vac	UL 758	UL approved
DC Connector	Interchangeable	Interchangeable	2Pins, 5A, 100V	--	Tested with appliance
Supplementary information:					
¹⁾ Provided evidence ensures the agreed level of compliance.					

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample no.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Results	
SN250108012C001	4.20	0.8	4.20	P	
SN250108012C002	4.20	0.8	4.20	P	
SN250108012C003	4.20	0.8	4.20	P	
SN250108012C004	4.20	0.8	4.20	P	
SN250108012C005	4.20	0.8	4.20	P	
Supplementary information: - No fire or explosion - No leakage					

7.3.1	TABLE: External short-circuit (cell)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT, °C	Results	
Samples charged at charging temperature upper limit (45°C)						
SN250108012C006	56.5	4.18	84	68.3	P	
SN250108012C007	56.5	4.17	88	66.8	P	
SN250108012C008	56.5	4.18	82	69.6	P	
SN250108012C009	56.5	4.18	83	70.1	P	
SN250108012C010	56.5	4.17	86	68.4	P	
Samples charged at charging temperature lower limit (10°C)						
SN250108012C011	56.3	4.14	87	67.5	P	
SN250108012C012	56.3	4.15	84	66.3	P	
SN250108012C013	56.3	4.15	86	68.2	P	
SN250108012C014	56.3	4.14	83	68.7	P	
SN250108012C015	56.3	4.15	81	65.9	P	
Supplementary information: - No fire or explosion						

7.3.2	TABLE: External short-circuit (battery)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT , °C	Component single fault condition	Results
SN25010801 2B004	22.6	4.19	82	70.1	Short circuit MOSFET U2 (pin 1-pin 3)	P
SN25010801 2B005	22.6	4.18	85	69.6	Short circuit MOSFET U2 (pin 1-pin 3)	P
SN25010801 2B006	22.6	4.18	81	68.3	Short circuit MOSFET U2 (pin 1-pin 3)	P
SN25010801 2B007	22.6	4.19	88	23.3	--	P
SN25010801 2B008	22.6	4.19	86	23.5	--	P
Supplementary information: - No fire or explosion						

7.3.5	TABLE: Crush (cells)				P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
Samples charged at charging temperature upper limit (45°C)					
SN250108012C029	4.18	4.18	13.02	P	
SN250108012C030	4.17	4.17	13.07	P	
SN250108012C031	4.18	4.18	13.11	P	
SN250108012C032	4.18	4.18	13.08	P	
SN250108012C033	4.17	4.17	13.04	P	
Samples charged at charging temperature lower limit (10°C)					
SN250108012C034	4.15	4.15	13.06	P	
SN250108012C035	4.15	4.15	13.02	P	
SN250108012C036	4.14	4.14	13.09	P	
SN250108012C037	4.15	4.15	13.07	P	
SN250108012C038	4.14	4.14	13.05	P	
Note: - A 13kN force applied at the longitudinal axis side of cylindrical cells. No voltage drop occurred.					
Supplementary information:					
- No fire or explosion					

7.3.6	TABLE: Over-charging of battery				P
Constant charging current (A).....:			8.0		—
Supply voltage (Vdc).....:			5.88		—
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
SN250108012B012	3.14	100	29.8	P	
SN250108012B013	3.15	100	29.6	P	
SN250108012B014	3.15	100	31.4	P	
SN250108012B015	3.14	100	30.2	P	
SN250108012B016	3.14	100	30.9	P	
Supplementary information:					
- No fire or explosion					

7.3.7	TABLE: Forced discharge (cells)				P
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge I _t (A)	Lower limit discharge voltage (Vdc)	Results	
SN250108012C039	3.13	2.0	3.0	P	
SN250108012C040	3.13	2.0	3.0	P	
SN250108012C041	3.14	2.0	3.0	P	
SN250108012C042	3.14	2.0	3.0	P	
SN250108012C043	3.13	2.0	3.0	P	
Supplementary information: - No fire or explosion					

7.3.8.1	TABLE: Vibration				P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results
SN250108012B017	4.19	4.18	92.898	92.893	P
SN250108012B018	4.18	4.17	92.895	92.891	P
SN250108012B019	4.19	4.18	92.901	92.897	P
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting					

7.3.8.2	TABLE: Mechanical shock					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
SN250108012B 020	4.18	4.18	92.896	92.894	P	
SN250108012B 021	4.19	4.19	92.894	92.891	P	
SN250108012B 022	4.19	4.19	92.899	92.897	P	
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting						

7.3.9	TABLE: Forced internal short circuit (cells)					P
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
Samples charged at charging temperature upper limit (45°C)						
SN250108012C 044	45	4.17	1	800	P	
SN250108012C 045	45	4.18	1	800	P	
SN250108012C 046	45	4.18	1	800	P	
SN250108012C 047	45	4.17	1*	800	P	
SN250108012C 048	45	4.18	1*	800	P	
Samples charged at charging temperature lower limit (10°C)						
SN250108012C 049	10	4.15	1	800	P	
SN250108012C 050	10	4.14	1	800	P	
SN250108012C 051	10	4.15	1	800	P	
SN250108012C 052	10	4.14	1*	800	P	
SN250108012C 053	10	4.15	1*	800	P	

Supplementary information:

¹⁾ Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.


2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

* No location 2 exists in this cell.


- No fire

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information:					

Attachment 1: Photo documentation

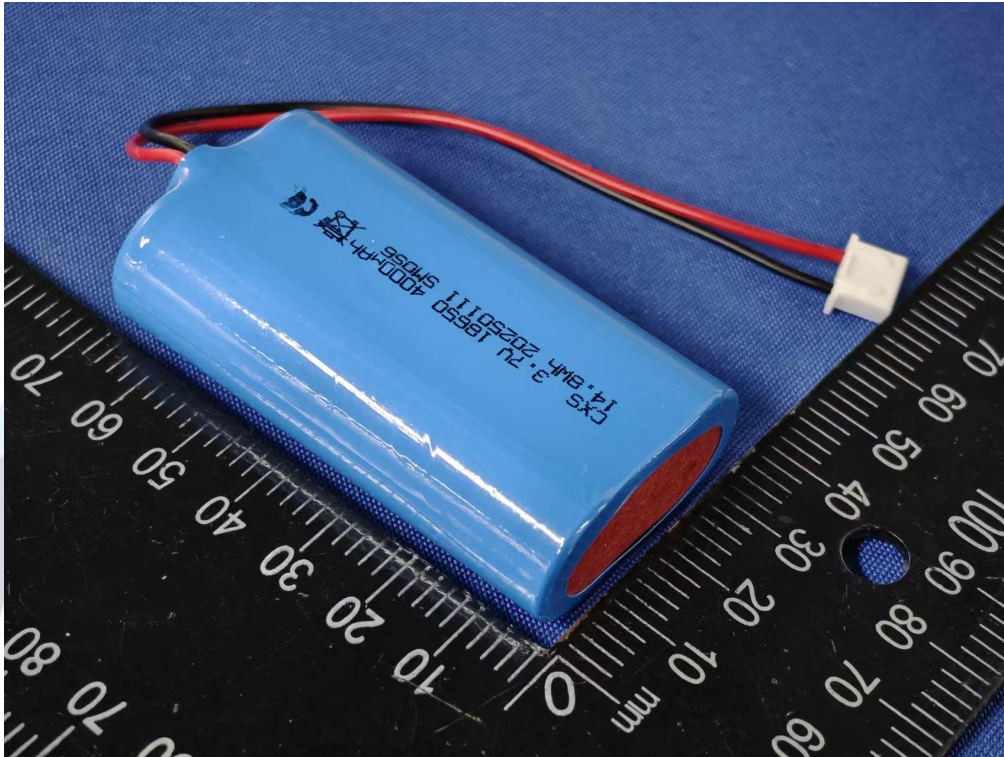

Picture 1. Front view of battery

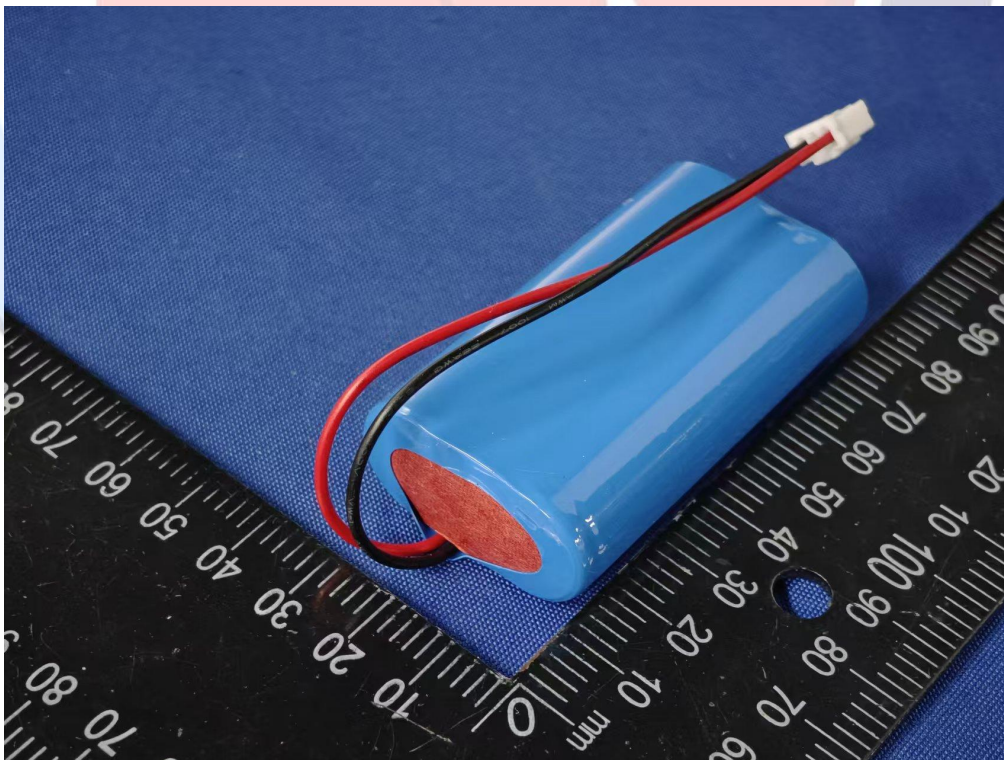


Picture 2. Back view of battery




Picture 3. Inner view-1 of battery



Picture 4. Inner view-2 of battery

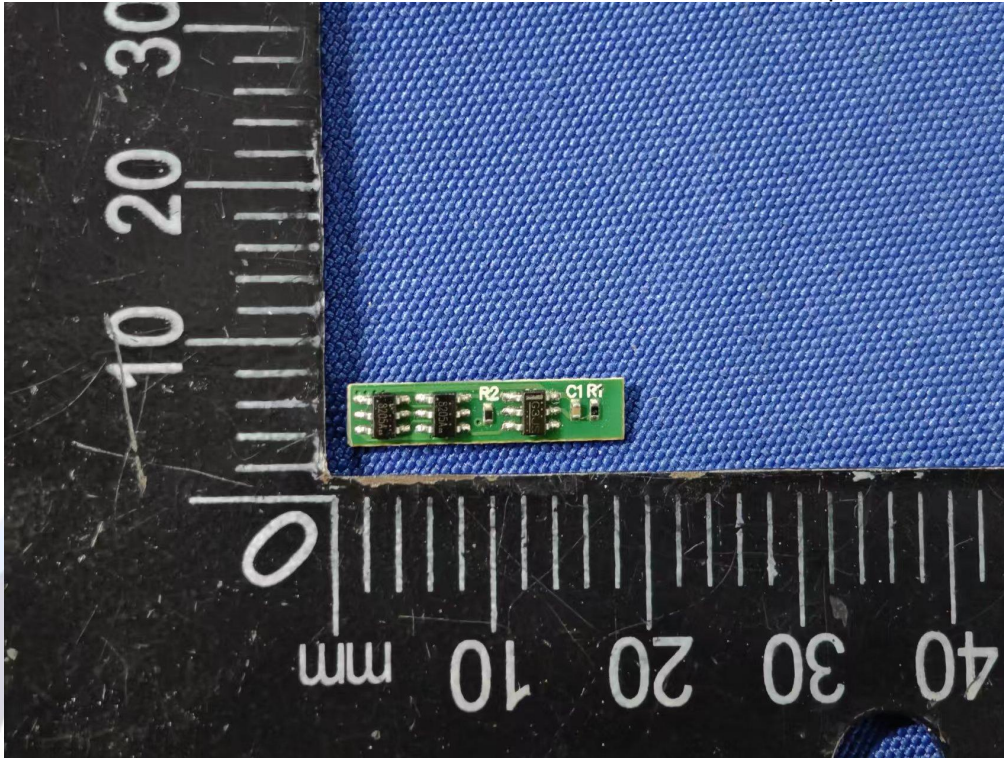

Picture 5. Component view of protection board

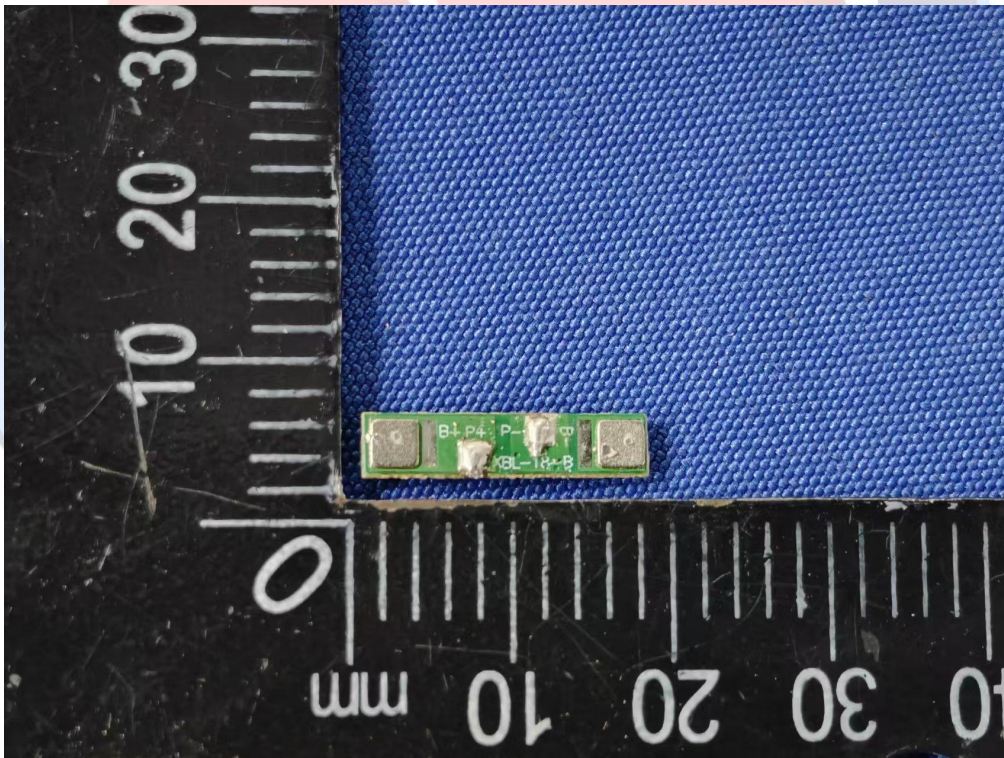

Picture 6. Back view of protection board



Picture 7. Side view-1 of cell



Picture 8. Side view-2 of cell

Important

1. The test report is invalid if it is not affixed the official seal of the laboratory to it.
2. Copies of the test report without the official seal of the laboratory are invalid.
3. It is forbidden to copy the test report partially without the written approval of the laboratory.
4. The test report is invalid without the signatures of Approver, Reviewer and Testing engineer.
5. The test report is invalid if it is blotted out.
6. Objections to the test report must be submitted to CMC within 15 days.
7. The test report is valid for the tested samples only.
8. As for the Verdict, “-” means “no need for judgement”, “P” means “pass”, “F” means “fail” and “N/A” means “not applicable”.

Testing laboratory: CMC Testing International (Shenzhen) Co., Ltd.

Address: 1-3/F., Building 7, He'er Hongben Industrial Zone, Dawangshan Community, Shajing
Subdistrict, Baoan District, Shenzhen, Guangdong, China

Tel: 400-1668-320

E-mail: info@cmczj-lab.com

<http://www.cmczj-lab.com>

-- End of Report --