



中国认可
国际互认
检测
TESTING
CNAS L5772

FCC TEST REPORT

for

Product: LED beauty mask

Model: QZ049, QZ042, QZ041

Trade Mark: /

Report No.: PTC26041000801E-FC01

Issued for

Shenzhen Liyoutong Technology Co., Ltd.

201, Building 5, Baoshan Industrial Park, No. 12 Baoshan Second Industrial Zone, Liuhe Community, Pingshan Street, Pingshan District, Shenzhen City

Issued by

Precise Testing & Certification (Guangdong) Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

TEL: +86-769-3880 8222

FAX: +86-769-3882 6111

Note: This report shall not be reproduced except in full, without the written approval of Precise Testing & Certification (Guangdong) Co., Ltd. This document may be altered or revised by Precise Testing & Certification (Guangdong) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results presented in this report only relate to the tested sample.





TABLE OF CONTENTS

1. TEST CERTIFICATION	3
2. TEST SUMMARY	4
3. TEST SITE	5
3.1. TEST FACILITY	5
3.2. MEASUREMENT UNCERTAINTY	5
3.3. DECISION RULE	6
3.4. LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
4. EUT DESCRIPTION	8
5. TEST METHODOLOGY	9
5.1. TEST MODE	9
5.2. EUT SYSTEM OPERATION	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1. DESCRIPTION OF SUPPORT UNITS	10
6.2. CONFIGURATION OF SYSTEM UNDER TEST	10
7. CONDUCTED EMISSION MEASUREMENT	11
7.1. LIMITS	11
7.2. TEST PROCEDURES	11
7.3. TEST SETUP	12
7.4. TEST RESULT	12
8. RADIATED EMISSION MEASUREMENT	13
8.1. LIMITS	13
8.2. TEST PROCEDURE	13
8.3. TEST SETUP	14
8.4. TEST RESULT	14
9. PHOTOGRAPHS OF THE TEST CONFIGURATION	20
10. PHOTOGRAPHS OF EUT	21
11. INFORMATION TO USER	32



1. TEST CERTIFICATION

Product:	LED beauty mask
Main Model:	QZ041
Series Model:	QZ042, QZ049
Applicant :	Shenzhen Liyoutong Technology Co., Ltd.
Address:	201, Building 5, Baoshan Industrial Park, No. 12 Baoshan Second Industrial Zone, Liuhe Community, Pingshan Street, Pingshan District, Shenzhen City
Manufacturer:	Shenzhen Liyoutong Technology Co., Ltd.
Address:	201, Building 5, Baoshan Industrial Park, No. 12 Baoshan Second Industrial Zone, Liuhe Community, Pingshan Street, Pingshan District, Shenzhen City
Factory:	Shenzhen Liyoutong Technology Co., Ltd.
Address:	201, Building 5, Baoshan Industrial Park, No. 12 Baoshan Second Industrial Zone, Liuhe Community, Pingshan Street, Pingshan District, Shenzhen City
Test Date:	Apr. 15 ,2026 to Apr. 22 ,2026
Issued Date:	Apr. 24 ,2026
Test Voltage:	DC 4V 0.8A
Applicable Standards:	FCC Part 15, Subpart B Class B ANSI C63.4:2014

The above equipment has been tested by Precise Testing & Certification (Guangdong) Co., Ltd. and found compliance with the requirements in the technical standards mentioned above. The test results presented in this report only relate to the product/system tested. The Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test Engineer:

Technical Manager:


Carson Zou / Engineer
Simon Pu / Manager



2. TEST SUMMARY

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Class B	N/A	N/A	N/A
	Radiated Emission	PASS	Complied with limit

Note: 1) The test result verdict is decided by the limit of test standard.

2) The information of measurement uncertainty is available upon the customer's request.

3) "N/A" for not applicable.

4) The actual power of the measured sample is DC , so it is not need tested.



3. TEST SITE

3.1. TEST FACILITY

Precise Testing & Certification (Guangdong) Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.

☆ CNAS Registration No.: CNAS L5772

☆ FCC Registration No.: 790290

☆ A2LA Certificate No.: 4408.01

☆ IC Registration No.: 12191A

3.2. MEASUREMENT UNCERTAINTY

Parameter	U _{lab}	U _{cispr}
Temperature	$\pm 1^{\circ} \text{C}$	-
Humidity	$\pm 5\%$	-
DC and Low Frequency Voltages	$\pm 3\%$	-
Conducted Emission(9KHz-150KHz)	$\pm 3.60\text{dB}$	$\pm 3.80\text{dB}$
Conducted Emission(9KHz-30MHz)	$\pm 3.60\text{dB}$	$\pm 3.40\text{dB}$
Radiated Emission(30MHz-1GHz)	$\pm 4.76\text{dB}$	$\pm 6.30\text{dB}$
Radiated Emission (1GHz-6GHz)	$\pm 4.44\text{dB}$	$\pm 5.20\text{dB}$
Radiated Emission (6GHz-18GHz)	$\pm 4.44\text{dB}$	$\pm 5.50\text{dB}$

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.3. DECISION RULE

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.
3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows: any additional uncertainty in the test system over and above that specified in harmonized standard should be used to tighten the test requirements-making the test harder to pass. This procedure will ensure that a test system not compliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system compliant with harmonized standard had been used.

3.4. LIST OF TEST AND MEASUREMENT INSTRUMENTS

3.4.1. For conducted emission at the mains terminals test

Name of Equipment	Manufacturer	Model	Serial No.	Last Cal.	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI3	101417	Aug. 14,2025	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Aug. 14,2025	1 Year
ISN	Rohde&Schwarz	ENY81	100118	Aug. 14,2025	1 Year
ISN	Rohde&Schwarz	NTFM8158	00252	Aug. 14,2025	1 Year
Test S/W	Tonscend	JS32-CE/4.0.0.3			



Report No.:PTC26041000801E-FC01

3.4.2. For radiated emission test (30MHz-1GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Last Cal.	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	Aug. 14,2025	1 Year
Bilog Antenna	SCHWARZBECK	VULB 9160	9160-3355	Sept. 10,2025	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9745	9745-0013	Mar. 21, 2025	1 Year
Test S/W	Tonscend	JS32-RE/4.0.0.0			

3.4.3. For radiated emission test (1GHz above)

Name of Equipment	Manufacturer	Model	Serial No.	Last Cal.	Calibration Interval
Spectrum Analyzer	Rohde&Schwarz	FSVR40	6625-01-588-5515	Aug. 14,2025	1 Year
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	Dec. 12,2025	1 Year
High NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Aug. 14,2025	1 Year
Test S/W	Tonscend	JS32-RE/4.0.0.0			



4. EUT DESCRIPTION

Product	LED beauty mask
Main Model	QZ041
Serires Model	QZ042, QZ049
Power Supply	DC 4V 0.8A
Power	/

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
AC Port	1	☐
DC Port	1	☒

Models Difference

All the models have almost the same electrical schematic diagram and structural design, see photodocuments for more details, the differences between them are shown in the follow table:

Model	DC port	Color
QZ049	4V/0.8A	Black
QZ042		Wite
QZ041		Black

For the differences listed above, unless otherwise specified, all tests shall be applied to the model QZ041 to represent all models which can obtain the most comprehensive assessment and cover the most severeconditions.



5. TEST METHODOLOGY

5.1. TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed.

Test Items		Test Mode
Emission	Conducted Emission	N/A
	Radiated Emission	Charging/Working

5.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipment.
2. Make sure the EUT work normally during the test.

6. SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1.	Adapter	N8157	N/A	N/A	N/A	N/A	N/A

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST

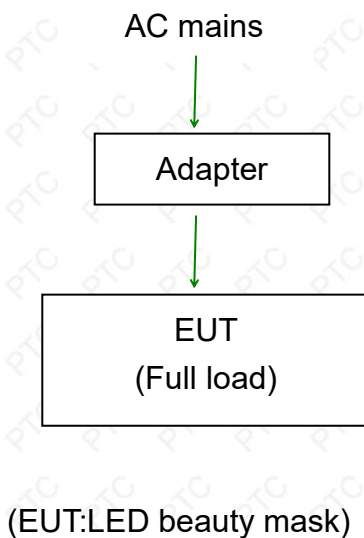



7. CONDUCTED EMISSION MEASUREMENT

7.1. LIMITS

FREQUENCY (MHz)	Class A		Class B	
	Quasi-peak dB(μ V)	Average dB(μ V)	Quasi-peak dB(μ V)	Average dB(μ V)
0.15 - 0.5	79	66	66-56	56-46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: 1) The lower limit shall apply at the transition frequencies.

2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.2. TEST PROCEDURES


The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane. The EUT should be 0.8 m apart from the AMN, where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, Details please refer to test setup photography.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

A scan was taken on both of the power lines, Line and neutral, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: Tonscend,JS32-RE/4.0.0.3..

7.3. TEST SETUP

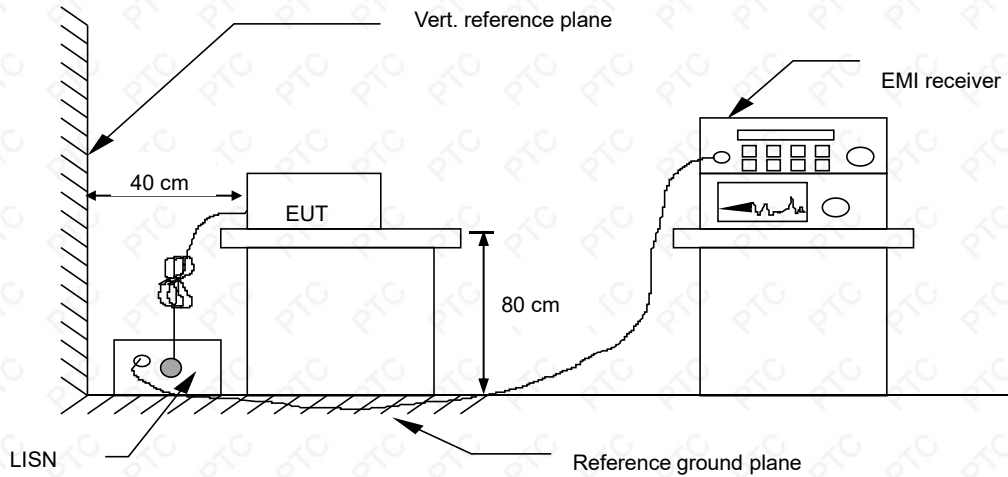

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.4. TEST RESULT

N/A



8. RADIATED EMISSION MEASUREMENT

8.1. LIMITS

Maximum permissible level of Radiated Emission measured at 3 meter distance.

FREQUENCY (MHz)	dB μ V/m (At 3m)	
	Class A digital device	Class B digital device
30~88	49.00	40.00
88~216	53.50	43.50
216~960	56.40	46.00
960~1000	59.50	54.00

Note: 1) The lower limit shall apply at the transition frequencies.

2) Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

8.2. TEST PROCEDURE

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor standing equipment, it is placed on the ground plane which has a 0.1 m non-conductive covering to insulate the EUT from the ground plane.

The antenna was placed at 3 meter away from the EUT. The antenna connected to the spectrum analyzer via a cable and at times a pre-amplifier would be used.


The analyzer / receiver quickly scanned from 30 MHz to 1000 MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

During the above scans, the emissions were maximized by cable manipulation. Each modes is measured, recorded at least the six highest emissions. The emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

Note: Test Software Name: Tonscend,JS32-RE/4.0.0.0.

8.3. TEST SETUP

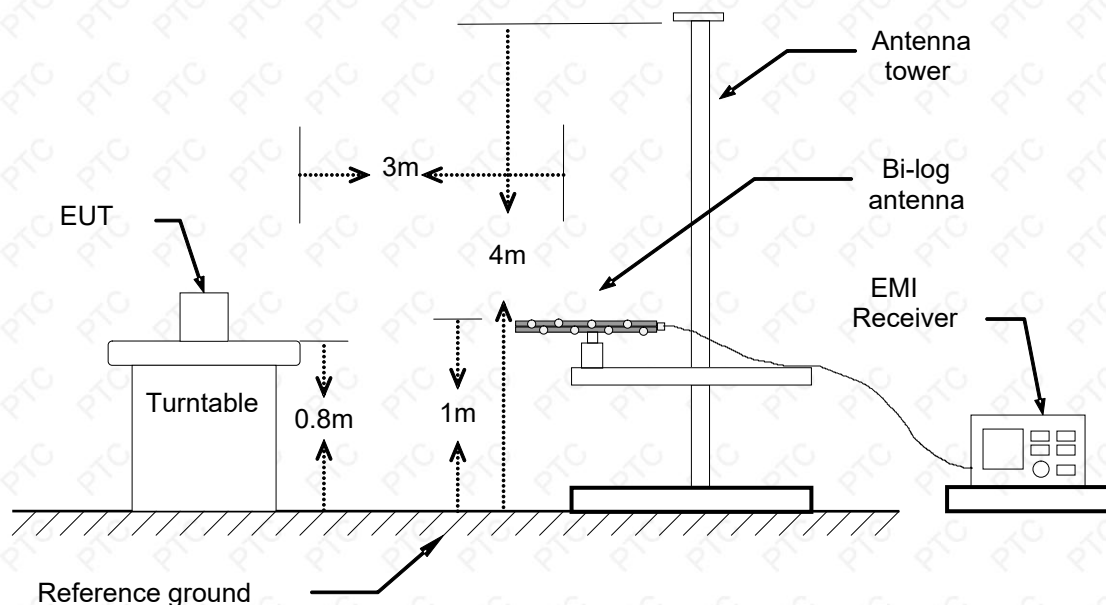

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

8.4. TEST RESULT

Product name	LED beauty mask	Antenna Distance	3 m
Model	QZ049	Antenna Pole	Vertical / Horizontal
Test Mode	Charging	Detector Function	Peak / Quasi-peak/AV
Environmental Conditions	24.5°C, 52 % RH, 101.3 kPa	6 dB Bandwidth	120 kHz
Tested By	Chenyue	Test Result	Pass

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading(dBμV)

Corr.Factor (dB/m)=Antenna factor(dB/m)+Cable loss(dB)-Preamp Factor(dB)

Measurement (dBμV/m)=Reading level(dBμV)+ Corr. Factor (dB/m)

Limit (dBμV/m) = Limit stated in standard

Over Limit (dB) = Measurement (dBμV/m) – Limit (dBμV/m)


QP = Quasi-Peak

The highest frequency of the internal sources of the EUT was less than 108 MHz, so the measurement was only made up to 1 GHz.



Please refer to the following diagram:


Vertical:

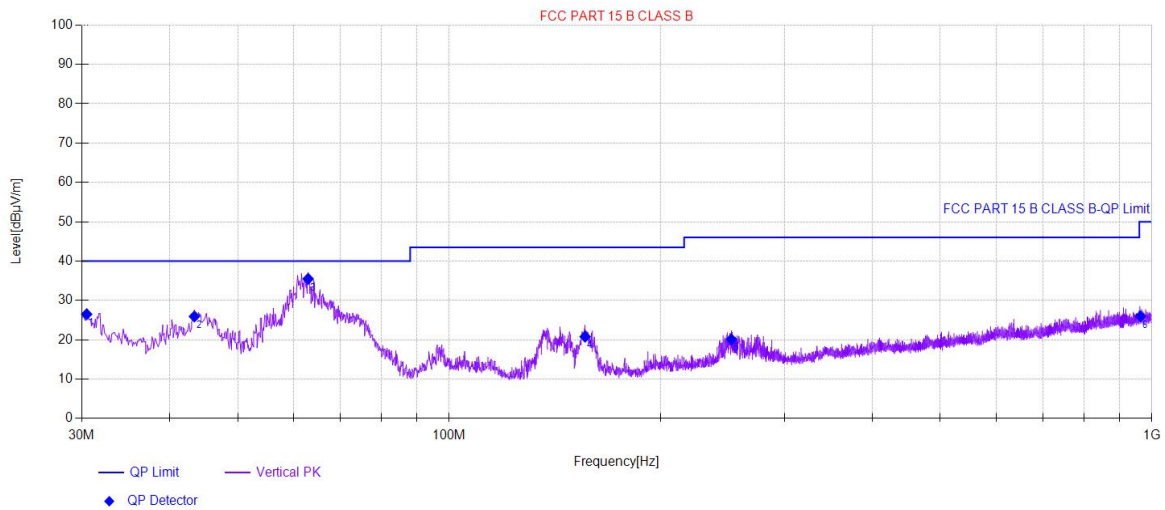

Final Test Data								
NO.	Freq. [MHz]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Result
1	30.49	26.50	40.00	13.50	100	90	Vertical	PASS
2	43.39	25.93	40.00	14.07	100	268	Vertical	PASS
3	62.98	35.49	40.00	4.51	100	214	Vertical	PASS
4	156.11	20.79	43.50	22.71	100	259	Vertical	PASS
5	252.15	20.09	46.00	25.91	100	178	Vertical	PASS
6	963.43	25.96	50.00	24.04	100	3	Vertical	PASS



Horizontal:

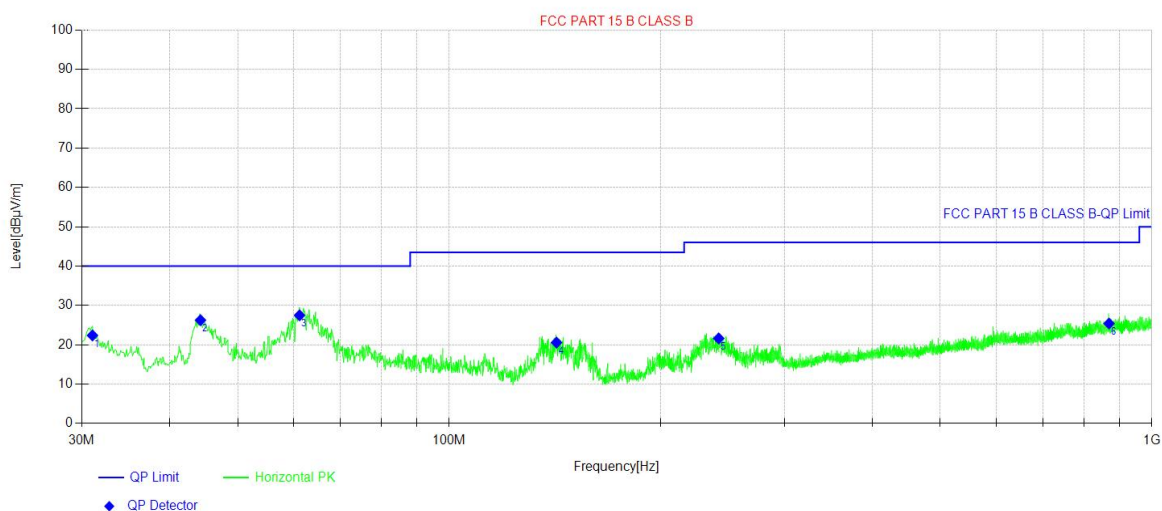

Final Test Data								
NO.	Freq. [MHz]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Result
1	31.07	22.38	40.00	17.62	200	340	Horizont	PASS
2	44.26	26.25	40.00	13.75	200	1	Horizont	PASS
3	61.24	27.49	40.00	12.51	200	331	Horizont	PASS
4	142.14	20.56	43.50	22.94	200	190	Horizont	PASS
5	241.87	21.62	46.00	24.38	200	21	Horizont	PASS
6	869.04	25.41	46.00	20.59	200	313	Horizont	PASS



Product name	LED beauty mask	Antenna Distance	3 m
Model	QZ049	Antenna Pole	Vertical / Horizontal
Test Mode	Working	Detector Function	Peak / Quasi-peak/AV
Environmental Conditions	24.5°C, 52 % RH, 101.3 kPa	6 dB Bandwidth	120 kHz
Tested By	Chenyue	Test Result	Pass

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading(dB μ V)

Corr.Factor (dB/m)=Antenna factor(dB/m)+Cable loss(dB)-Preamp Factor(dB)

Measurement (dB μ V/m)=Reading level(dB μ V)+ Corr. Factor (dB/m)

Limit (dB μ V/m) = Limit stated in standard

Over Limit (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)


QP = Quasi-Peak

The highest frequency of the internal sources of the EUT was less than 108 MHz, so the measurement was only made up to 1 GHz.



Please refer to the following diagram:


Vertical:

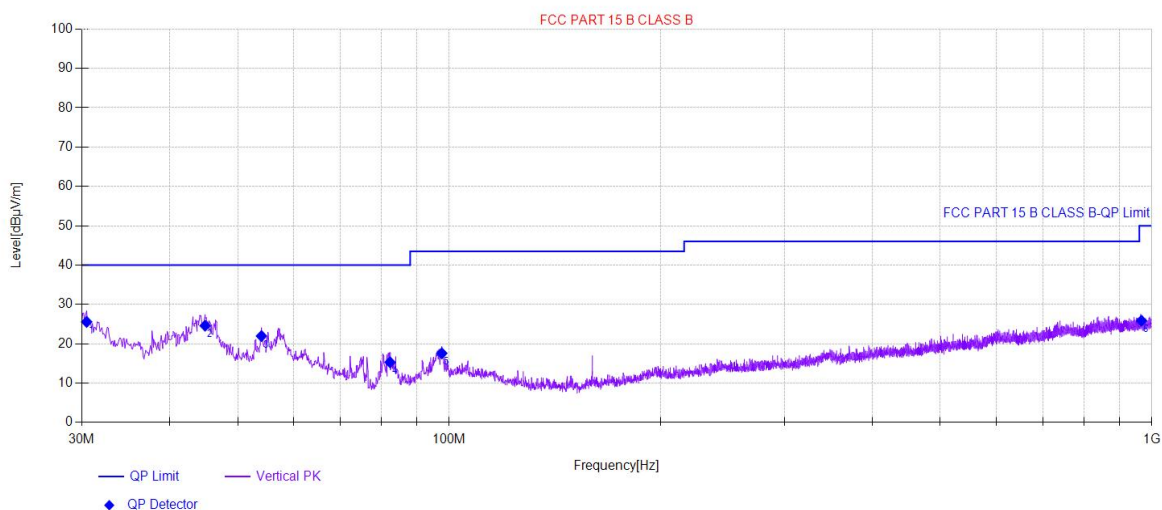

Final Test Data								
NO.	Freq. [MHz]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Result
1	30.49	25.57	40.00	14.43	100	47	Vertical	PASS
2	44.94	24.60	40.00	15.40	100	125	Vertical	PASS
3	54.06	21.97	40.00	18.03	100	47	Vertical	PASS
4	82.39	15.30	40.00	24.70	100	320	Vertical	PASS
5	97.62	17.58	43.50	25.92	100	283	Vertical	PASS
6	966.53	25.85	50.00	24.15	100	359	Vertical	PASS




Horizontal:

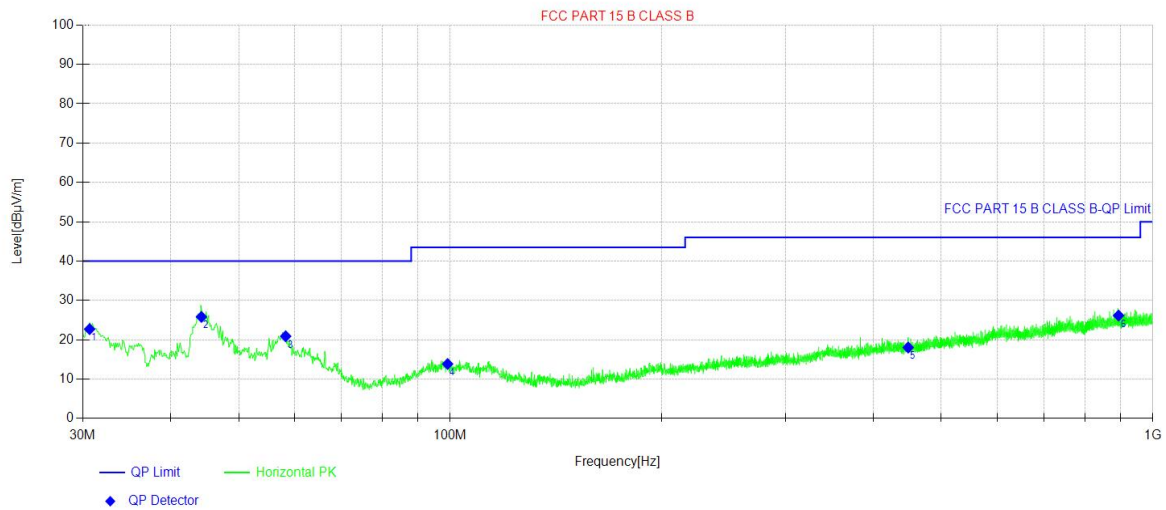

Final Test Data								
NO.	Freq. [MHz]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Result
1	30.68	22.71	40.00	17.29	200	108	Horizont	PASS
2	44.26	25.82	40.00	14.18	200	55	Horizont	PASS
3	58.33	20.90	40.00	19.10	200	360	Horizont	PASS
4	99.17	13.85	43.50	29.65	200	275	Horizont	PASS
5	448.60	18.04	46.00	27.96	200	356	Horizont	PASS
6	893.68	26.16	46.00	19.84	200	360	Horizont	PASS

9. PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

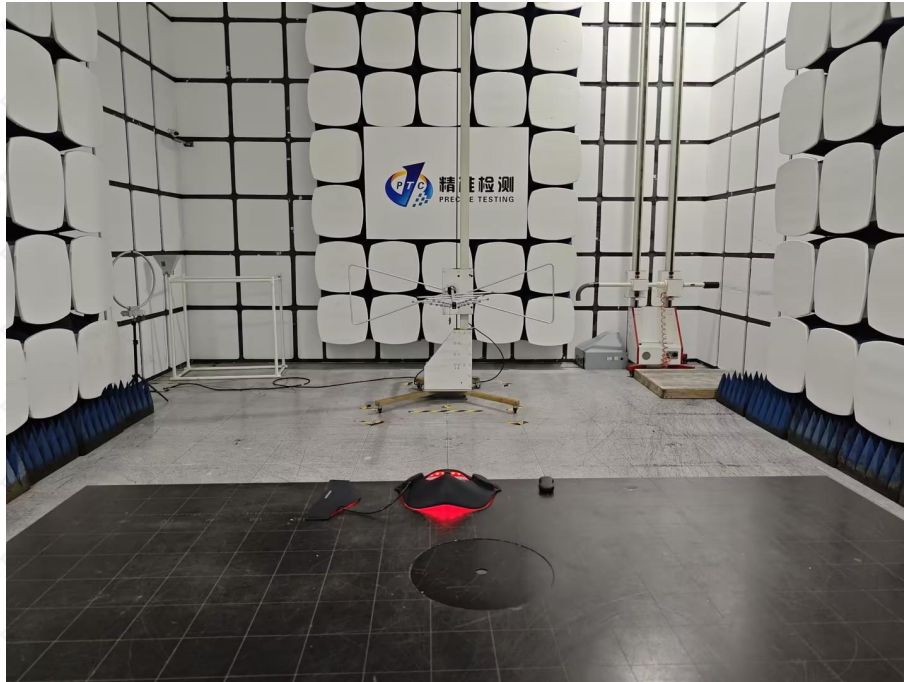

10. PHOTOGRAPHS OF EUT



Model No.: QZ041









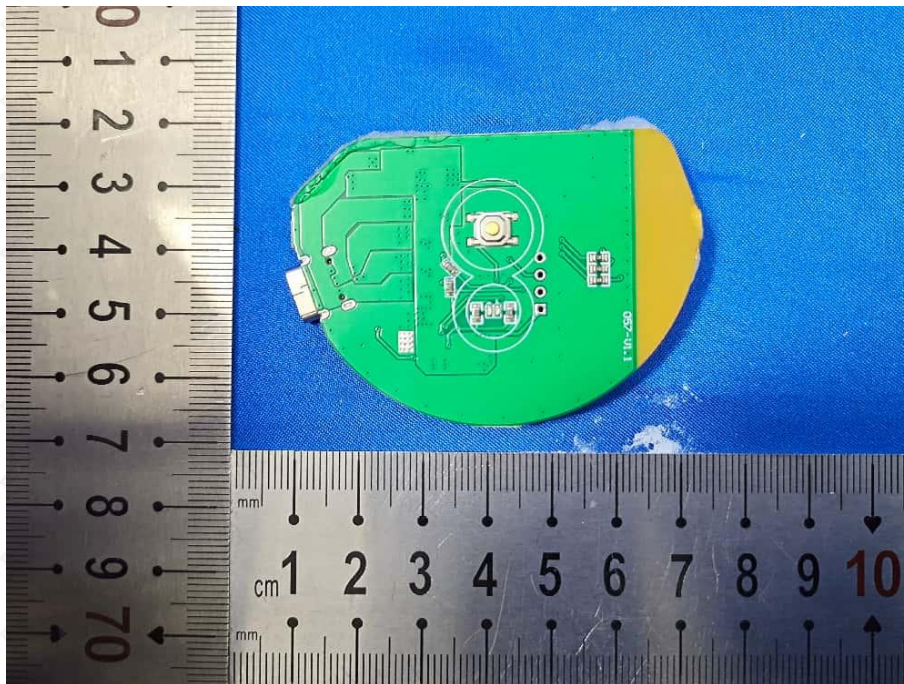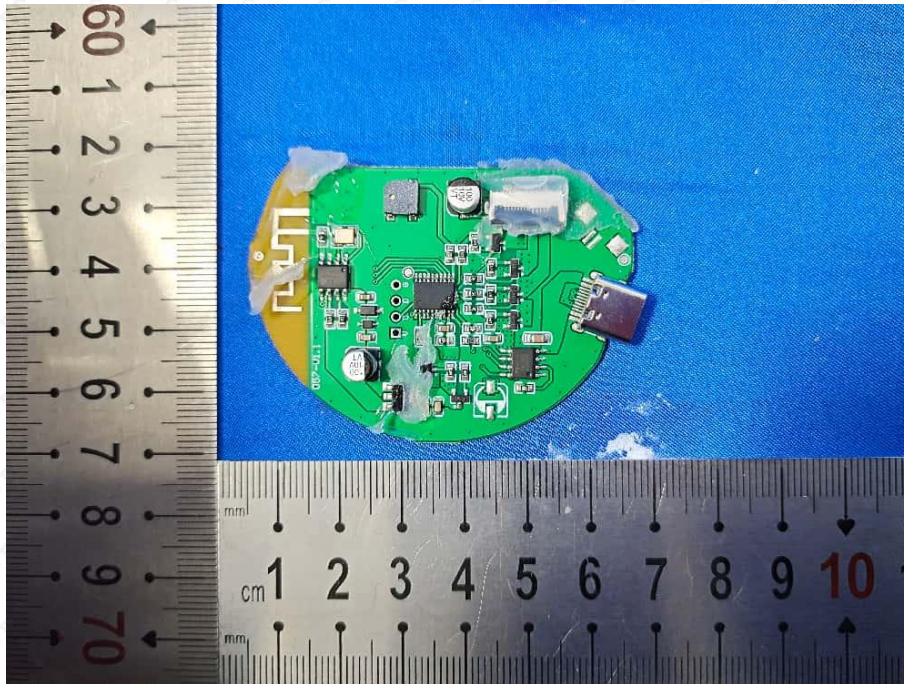




Model No.: QZ049





Model No.: QZ042



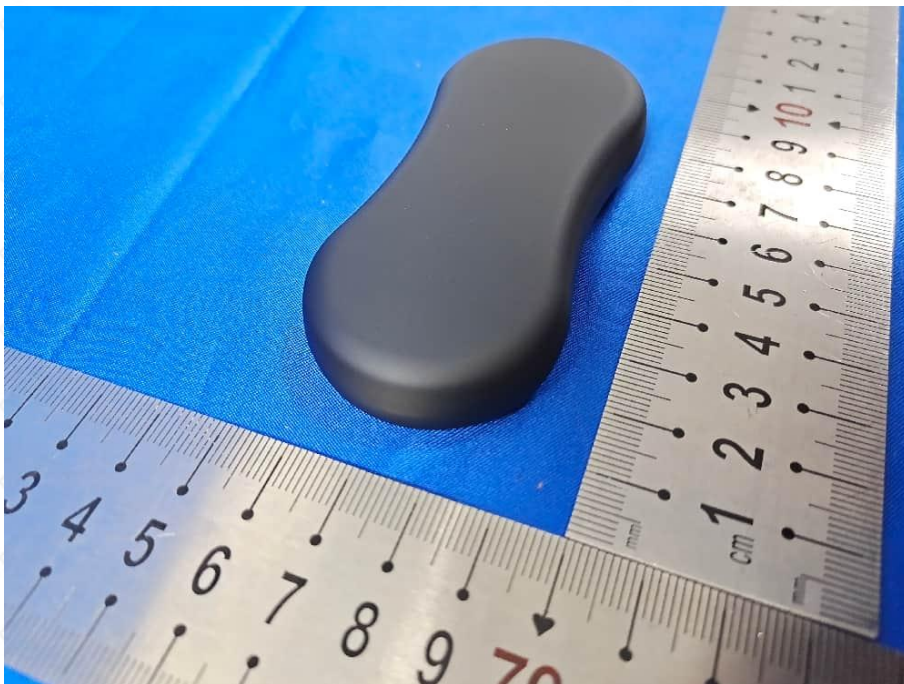

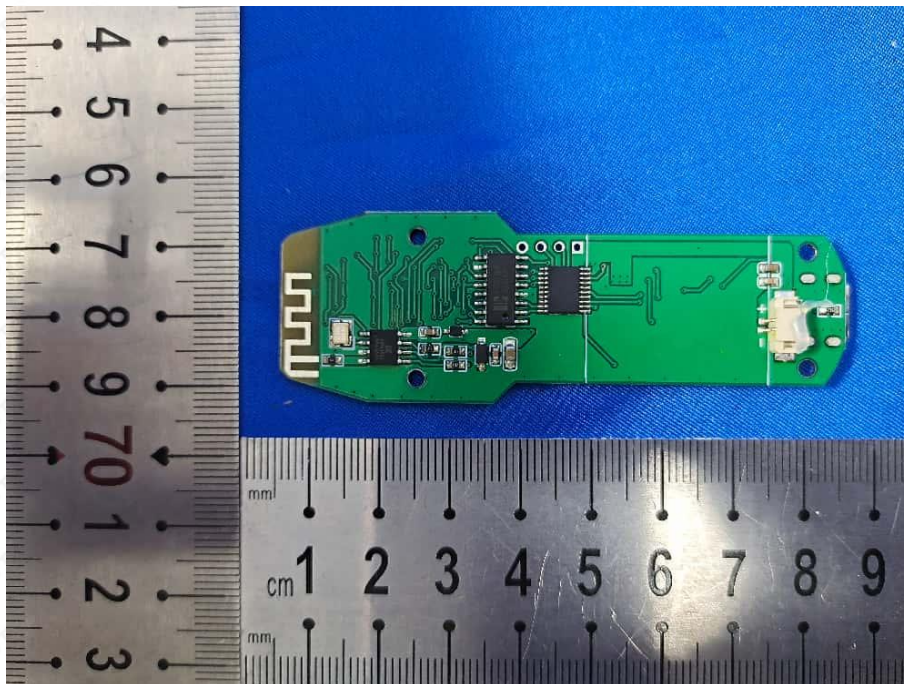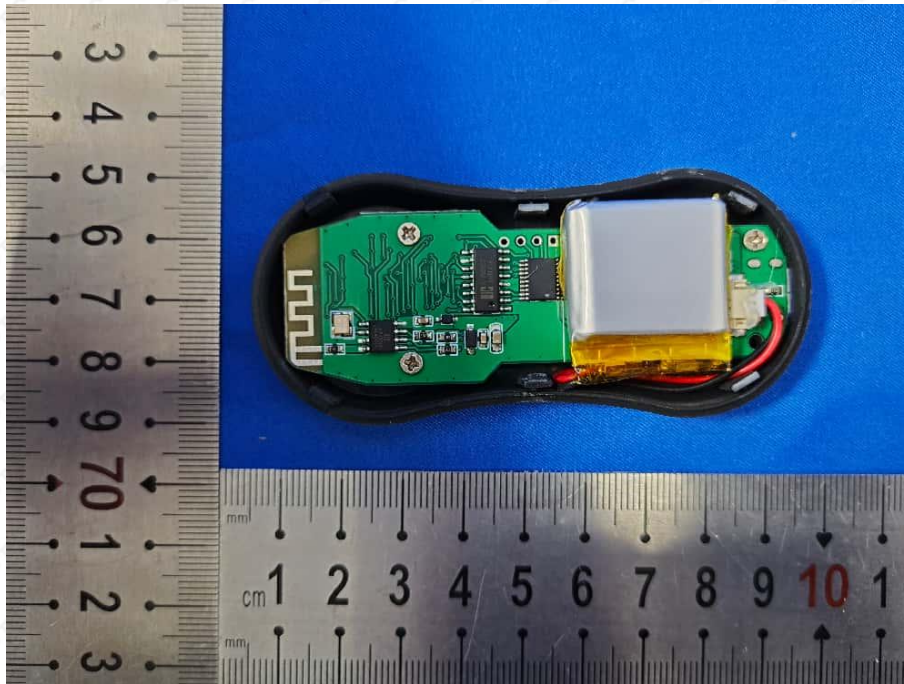

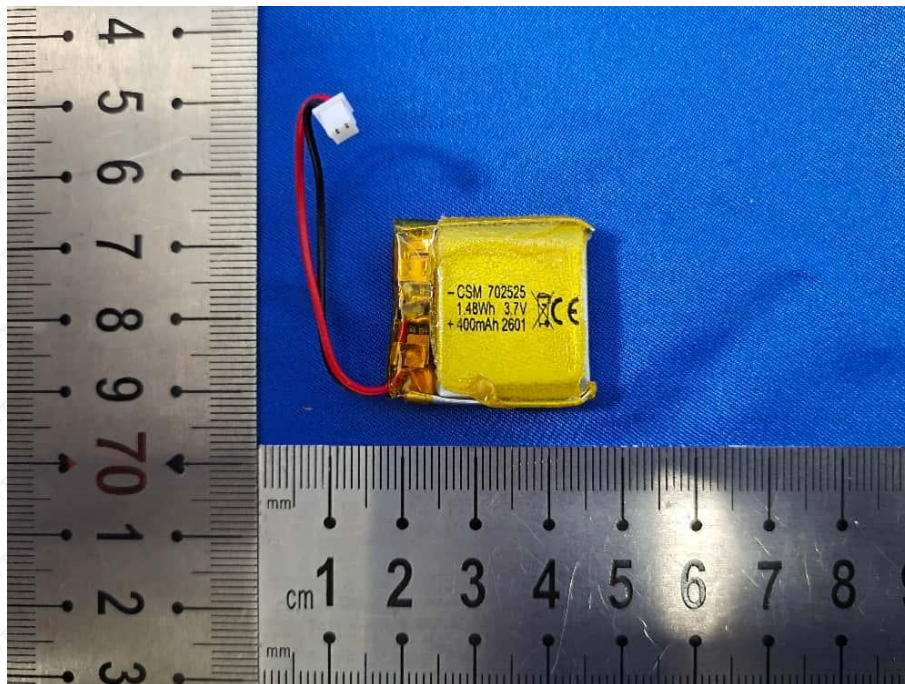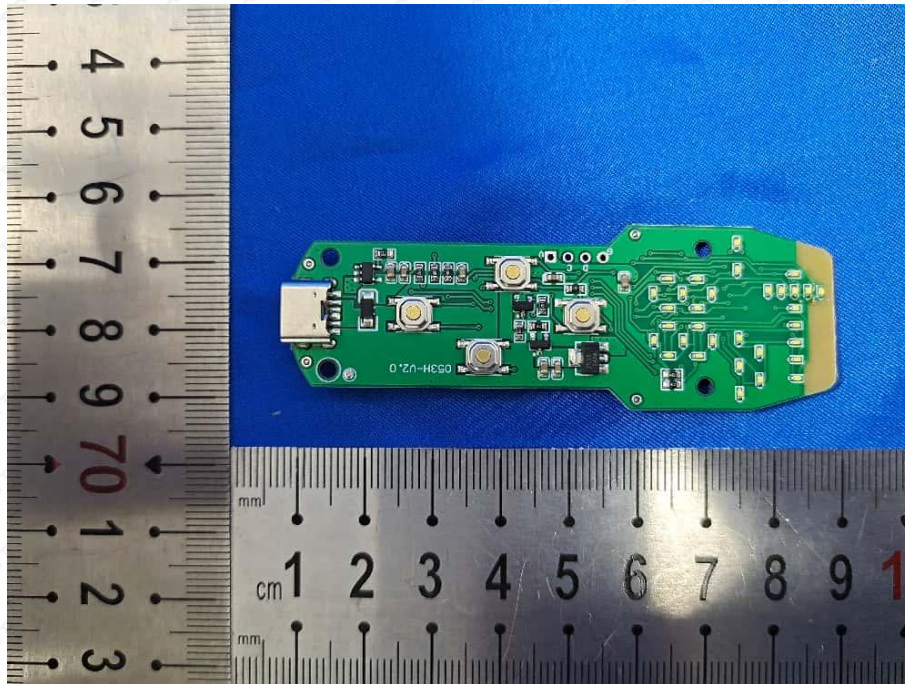



LABELING REQUIREMENTS

According to FCC Part 15 Section 15.19, a device subject to certification or Supplier's Declaration of Conformity shall be labeled as follows:

“This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.”

The device shall bear the statement in a conspicuous location on the device.

Devices subject to authorization under Supplier's Declaration of Conformity may be labeled with the FCC logo on a voluntary basis as a visual indication that the product complies with the applicable FCC requirements.

Note: The Commission concluded that if the labeling and regulatory information cannot be displayed to the intended recipient “in a manner that effects its purpose,” the device is incapable of digitally displaying the required information as required by the E-LABEL Act. Electronic labeling information must be electronically displayed in a manner that is “clearly legible without the aid of magnification” Similarly, because electronic labels cannot be easily removed or replaced if they are to be effective, manufacturers that choose to display required labeling information electronically must ensure that the information may not be removed or modified by anyone other than the responsible party.



11. INFORMATION TO USER

If a product must be tested and authorized under Supplier's Declaration of Conformity, a compliance information statement shall be supplied with product at the time of marketing or importation, containing the following information:

- (1) Identification of the product, e.g., name and model number;
- (2) A compliance statement as applicable, e.g., for devices subject to part 15 of this chapter as specified in 15.19(a)(3) of this chapter, that the product complies with the rules; and
- (3) The identification, by name, address and telephone number or Internet contact information, of the responsible party. The responsible party for Supplier's Declaration of Conformity must be located within the United States.

According to FCC Part 15 section 15.21, the users manual or instruction manual for an intentional or unintentional radiator shall caution the user that:

"Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment".

Also, refer to FCC Part 15 section 15.105, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

"Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help."

— End of report —